



Vulcan® Moveable Barrier
Vulcan® Transfer Attachment



TRINITY
HIGHWAY
Ahead of the Curve®

Vulcan® Moveable

The Vulcan® Moveable Barrier is a steel barrier comprised of lightweight, galvanized steel segments. It is tested to NCHRP Report 350 Test Level 3 and Test Level 4, and EN1317 H2 and N2 specifications. The Vulcan® Moveable Barrier is designed for easier movement with the Vulcan® Transfer Attachment (VTA) when connected to a skid steer or front end loader. The VTA is also designed to help the operator work from either side of the barrier.

Assembly and Maintenance

- Sections designed for easier replacement if damaged.
- Can be installed anchored or freestanding.



Features

- One mile of Vulcan® Moveable Barrier can be opened or closed in approximately 20 minutes with the VTA.
- Galvanized steel construction for durability.
- Can be used on bridge decks.
- Can be anchored with other compatible end treatments or used freestanding.
- Compatible with the Vulcan® Gate.

VTA Features

- Attaches to a standard skid steer or front end loader.
- VTA can be removed to allow the skid steer or front end loader to be used elsewhere in the work zone.

Specifications

Vulcan® Moveable Barrier


- 2' 8" (813 mm) High
- 13.5' (4.1 m) Long
- 1' 10.5" (.546 m) Wide
- 1,020 lbs. (460 kg) Per Section

Vulcan® Transfer Attachment

- 4' 2" (1.27 m) High
- 3' 10" (1.17 m) Long
- 108" (2.74 m) Skid

Steer Width

- 1,160 lbs. (526 kg) Skid Steer
- 120" (3.05 m) Front End Loader Width
- 1,450 lbs. (658 kg) Front End

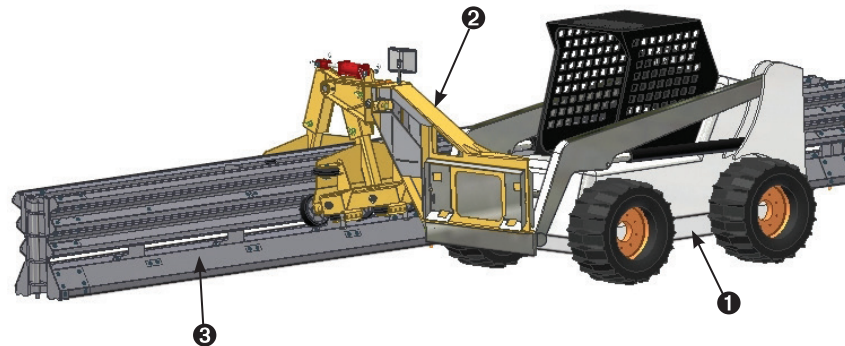

- ① Standard Skid Steer
- ② Vulcan Transfer Attachment (VTA)
- ③ Vulcan Barrier

An original  ENERGY ABSORPTION SYSTEMS, INC. product.

Distributed by:

